




Public Address System

Ceiling Speaker System WA112




FREQ. RESPONSE

(dB SPL, 1W, 1m)

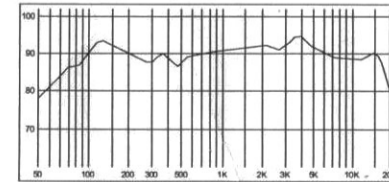


DISTORTION


(THD < 1.5% 1W, 1m, 200Hz-10kHz)

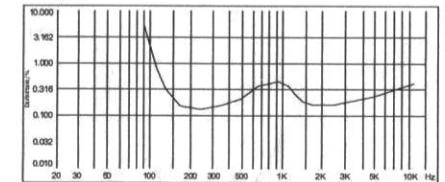

DIMENSIONS



INSTALLATION HOLE




Install the Speaker System only need 9cm depth on your ceiling

INSTALLATION

1. Cut a \varnothing 178mm- \varnothing 190mm installation hole on ceiling as shown above.
2. Adjust the clamps of the speaker system suited for different ply of ceiling.
3. Connect audio broadcasting wire to the terminals according to the table below.

Power Terminals	Line Voltage	70V	100V
Red--- White		1.5W	3 W
Red--- Blue		3 W	6 W
Red---Black		5 W	—

4. Turn up the clamps of the speaker and insert them into the installation hole on ceiling and then release them as shown below. **Put on your gloves for safe is recommended .**



5. Finally, examine whether it is steady.

OWNER'S MANUAL

Thank you for purchasing PA speaker system of ABK series. All of ABK series products have been tested strictly before shipping. ABK series PA speaker system is widely used in hotel, trade building, supermarket, school, entertainment, etc. It's the most ideal choice of you! In order to facilitate installing, modulating and running please read this manual carefully before setup.

FEATURES:

- 70/100V, 1.5-6W with multiple terminals, suited for different field;
- Max. Sound Pressure Level 100 ± 2 dB, Effective Freq. Range 80Hz-14kHz;
- Weight 1.1 kg, equipped with clamps for mounting convenient;
- Made of high-class steel, long-term durability, never out of shape;
- Driver surround excellent damping, provided with high sensitivity (92 ± 2 dB), long life, sound clear and sonorousness.

Guangzhou DSPPA Audio Co., Ltd.